

Avonic AV-CAP100

Capture Device HDMI to USB3.0



User Manual

Version 1.3

Update notes:

New VLC instructions

Twitter account updated

Join Avonic



[linkedin.com/company/avonic](https://www.linkedin.com/company/avonic)



twitter.com/avonic



facebook.com/avonic

Contents

Inhoud

Contents.....	2
Introduction	3
Congratulations.....	3
Safety Notes	3
Package contents and Accessories.....	3
Product Overview	4
Features.....	4
Product Description.....	4
Installation	5
Connection Diagram	5
Operation Instructions	5
VLC.....	6
Contact.....	7
Appendix.....	8
Technical Data	8

Introduction

Congratulations

Thank you for purchasing the Avonic AV-CAP100 device. Before beginning to operate this device, please read the manual in order to make sure the best performance is obtained. Save this manual for future reference.

Safety Notes

- Installation and servicing should only be done by Qualified Service Personnel and conform to all local codes.
- This unit is designed for indoor use only and it must not be installed where exposed to water or other liquids and moisture.
- Before powering on the device, check the input power voltage carefully.
- Avoid shock and vibration when transporting and installing the device.
- Use wall mount brackets or ceiling mount brackets available at Avonic for safe installation.
- Electronic devices produce heat. Do not block the ventilation slots of the device and make sure the installation environment is well ventilated to avoid overheating.
- Before cleaning, unplug the power cable. Use a soft, damp cloth to clean the device, do not use strong or abrasive detergent to clean that will damage the device.
- If you wish to dispose this product, please contact Avonic to obtain info about the take-back procedure.

Package contents and Accessories

Quantity	Description	Avonic SKU
1 pc	HDMI to USB3.0 Video Capture Dongle	AV-CAP100
1 pc	USB 3.0 cable	-


Product Overview

The Avonic AV-CAP100 HDMI to USB3.0 Video Capture Dongle is easy to carry, has a superior performance and superior compatibility. It can capture one HDMI 1080p60 input and output signal; compatible with Windows, Linux, Mac OS X and USB 3.0 interface. Compatible with many USB 3.0 chipset (Intel, Renesas, ASMedia, Fresco Logic), compatible with PCIe Gen1.1 x1 expansion via USB 3.0 interface. The HDMI video capture meets UVC and UAC standard, without having to install any additional drivers.

Features

- It doesn't need to install a driver, and it is truly PnP.
- It is compatible with Windows, Linux, OS X operating systems
- USB3.0, 300-350MB/s throughput and it is compatible with USB 2.0
- The process of video and audio is done by the dongle and will not occupy the CPU.
- It can capture one single channel HD HDMI video signals.
- It can automatically detect the input video formats and it will adjust to the set output size and frame rate automatically.
- The input and output video signal can reach 1080p60 Hz.
- It is compatible with UVC video capture and YUV 4:2:2 video output.

Product Description

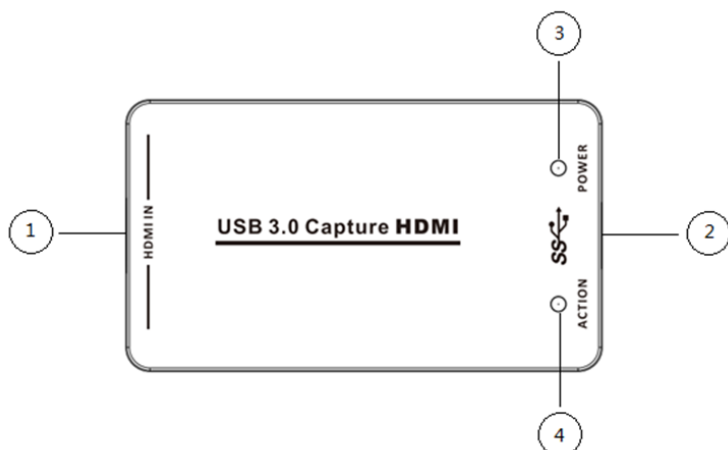

1. HDMI Input: connect the HDMI source output like DVD, Set-top Box or Notebook.
2. USB3.0 Capture out: connect to the USB3.0 input of the computer or Notebook.
3. Power indicator: LED illuminates when the device is connected to computer USB port.
4. Action indicator: LED illuminates when the device capture the video normally.

Installation

Connection Diagram



Use a high quality HDMI cable connect the source to the dongle.

Use a USB 3.0 cable to connect from the dongle to PC or Notebook.

Operation Instructions

The Avonic AV-CAP100 HDMI to USB3.0 Video Capture Dongle is based on UVC (USB video class) and UAC (USB audio class) standard. No additional drivers have to be installed. After installation in operating system, the relevant video and audio devices will be added. In the Windows Device Manager, for example, will appear two new devices:


- Under Imaging Devices: USB3.0 Capture video
- Under Audio inputs and outputs: USB3.0 Capture audio

Use a third party Video Media Player like PotPlayer, VLC, Windows Media Player to play and store the captured video content.


VLC

To view the image from the AV-CAP100 in VLC, open a new media.

Open Media, Capture Device, Device Name, enter the desired Video Size in the Options section

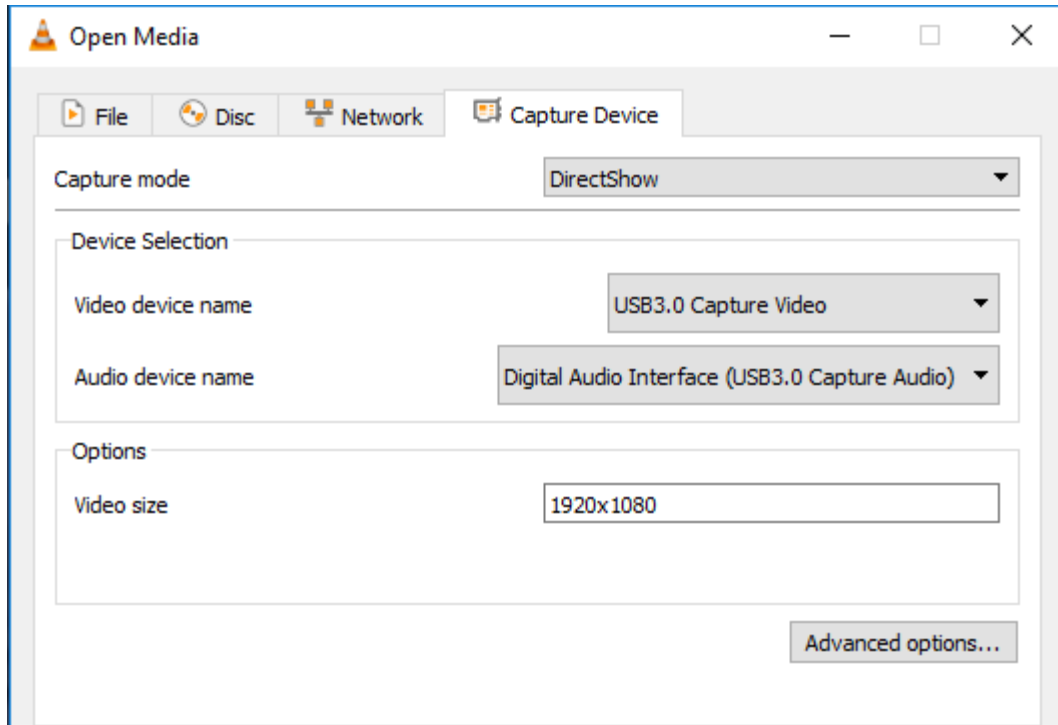

Press Advanced Options, enter the desired aspect ratio

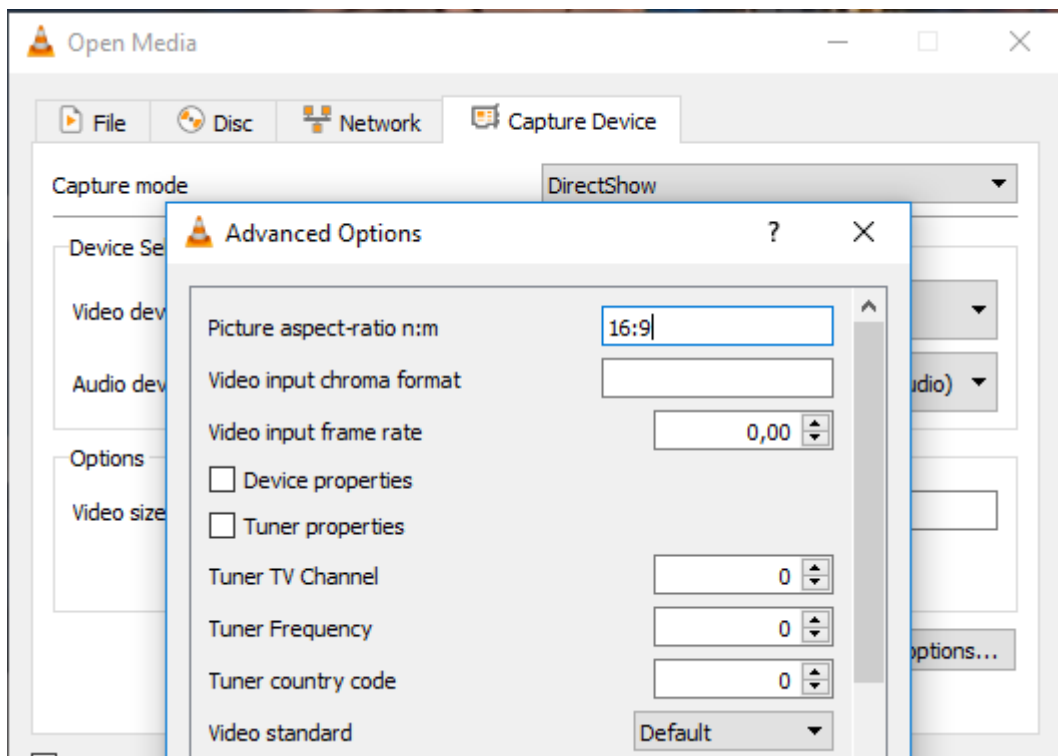

Contact

For any questions or suggestions, contact the reseller or the local distributor of Avonic. Find the local distributor on the website of Avonic.

For the recent manual or datasheet, look at the Avonic website.

www.avonic.eu

Appendix

Technical Data

Host Interface	USB3.0, *300-350MB/s, USB2.0, *40MB/s
Input Interface	HDMI interface
HDMI Input Formats	1080p24/25/30/50/60;
Output Formats Resolutions:	640x480 / 720x480 / 720x576 / 768x576 / 800x600 / 1024x768 / 1280x720 / 1280x800 / 1280x960 / 1280x1024 / 1368x768 / 1440x900 / 1600x1200/ 1680x1050/ 1920x1080/ 1920x1200/ 640x360/ 856x480 /960x540/ 1024x576
Frame Rate:	25/29.97/30/50/59.94/60 fps
Audio and video capture	standards of UVC and UAC
OS	Windows7, Windows Server 2008 R2,Linux (Kernel version 2.6.38 and above), OS X (10.8 and above)
Software compatibility	Windows Media Encoder, Adobe Flash Media Live Encoder, Real Producer Plus, VLC, Linux, QuickTime Broadcaster, QuickTime Player, Wirecast, Potplayer etc.
Size	98x56x16 (L/W/H, mm)
Power consumption	<= 2.5W
Working Temperature	0-50 °C
Storage Temperature	-20-70 °C
Storage Humidity	5%-90%